


LOCAL PRODUCT CODES AND BATCH EXPLANATIONS

FLOORFLEX TILES

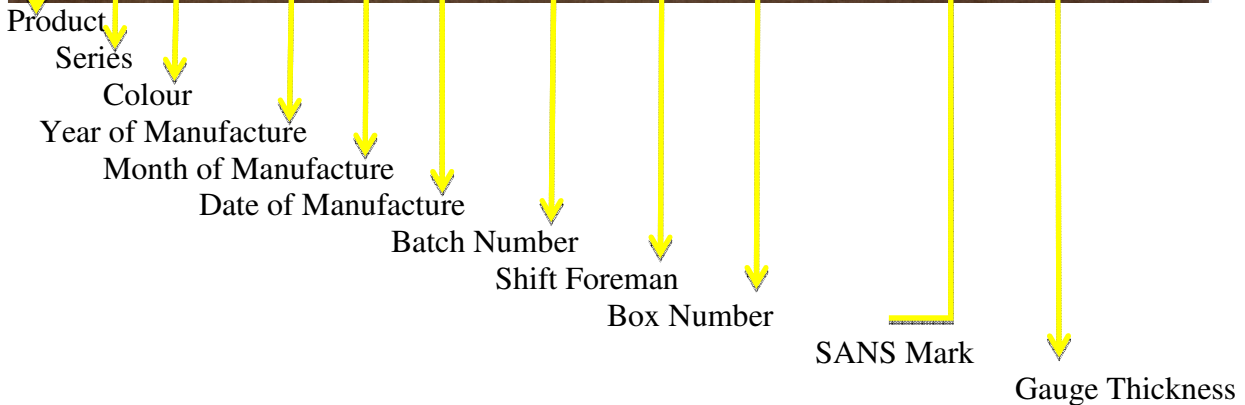

Product: (MF) – Floorflex Tiles

Series: (25) - When colour changes are made a new series number is introduced

Colour: (22) - Copper

Year of Manufacture: (20) - 2020

Month of Manufacture: (05) - May

Date of Manufacture: (21) - 21st Thursday

Batch: Number or Sequence: (003) [Probably the most significant number]


Shift Foreman: (V) - Responsible person on the line at the time of manufacture

Box Number: (0101) - Only relevant to the factory

SABS Mark: Bureau of Standards endorsement – Floorflex is 581 compliant

Gauge: (2,5mm) Thickness of the product

SUPERFLEX TILES

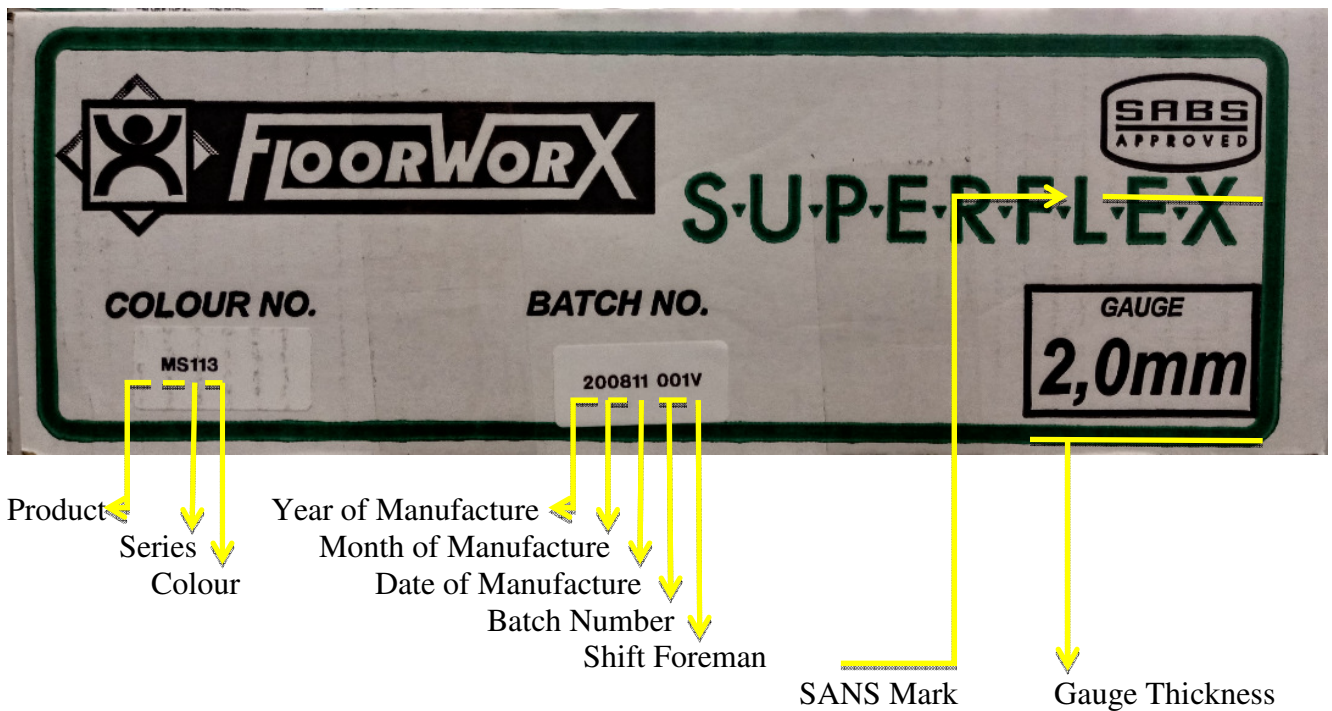

Product: (MS) – Superflex Tiles

Series: (1) - When colour changes are made a new series number is introduced

Colour: (13) - Charcoal

Year of Manufacture: (20) - 2020

Month of Manufacture: (08) - August


Date of Manufacture: (11) - 11th Tuesday

Batch: Number or Sequence: (001) [Probably the most significant number]

Shift Foreman: (V) Responsible person on the line at the time of manufacture

SABS Mark: Bureau of Standards endorsement – Superflex is 786 compliant

Gauge: (2,0mm) Thickness of the product

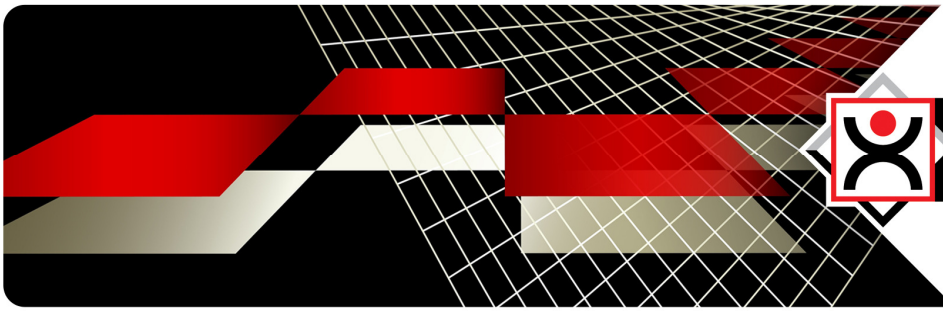


FLOORWORX


THE FLOORING SOLUTIONS PROVIDER

SUPERFLEX ROLLS

SUPERFLEX
FLOOR SHEETING

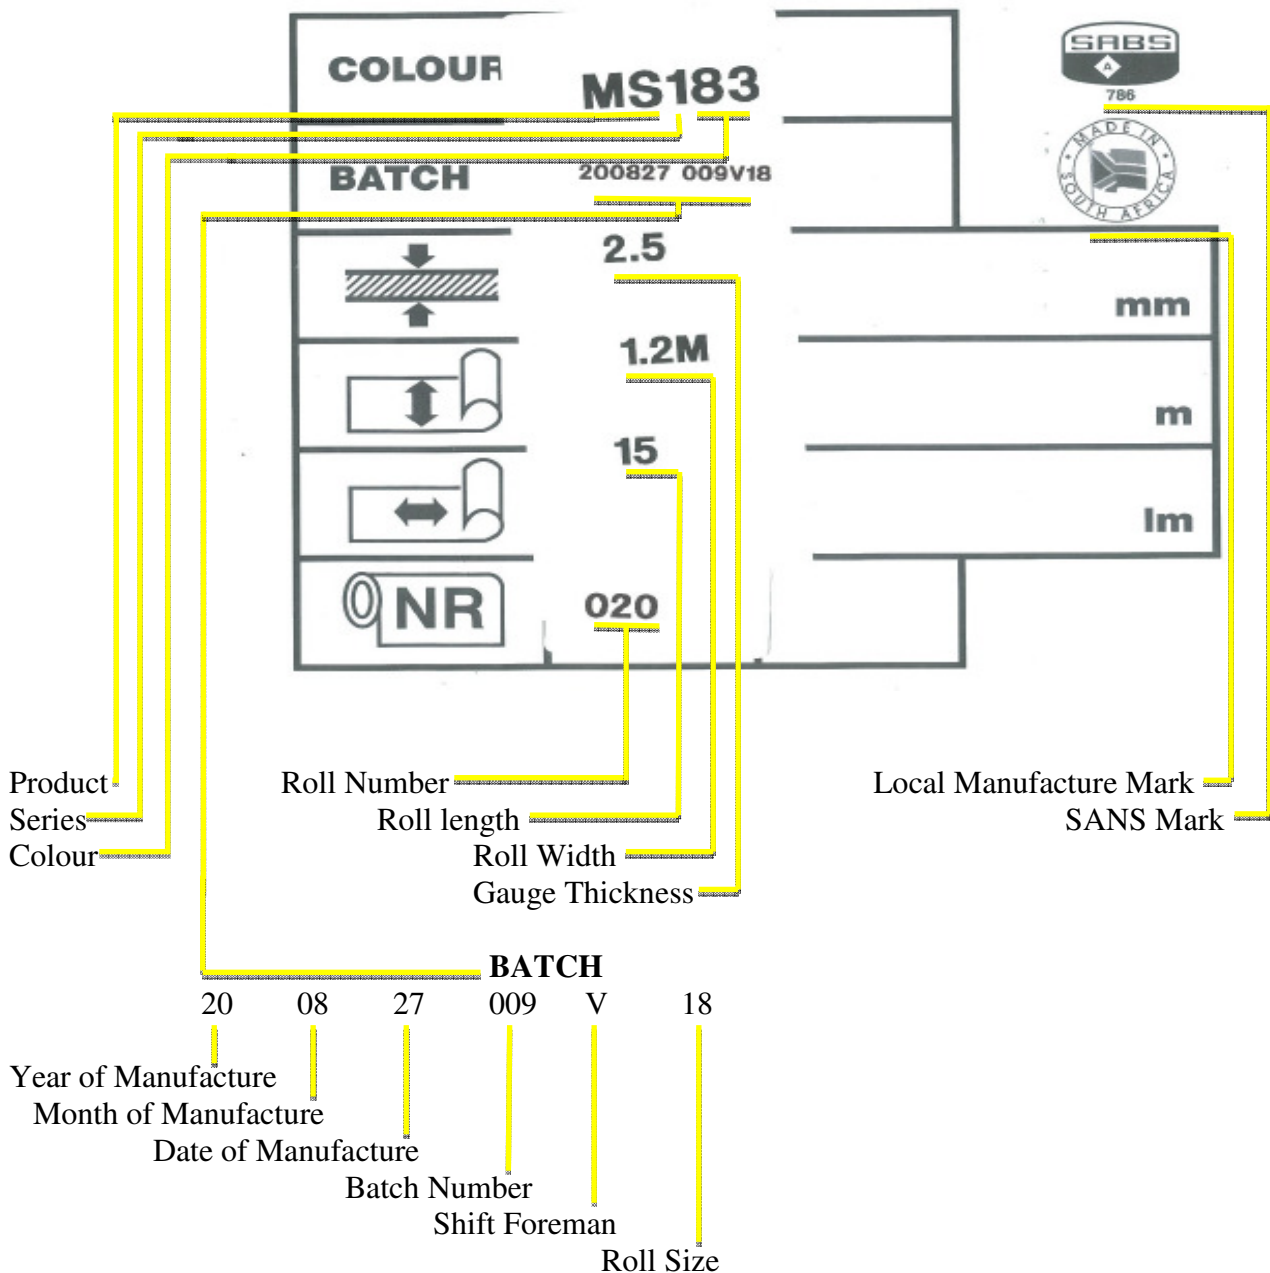

An Accéntuate Limited Company

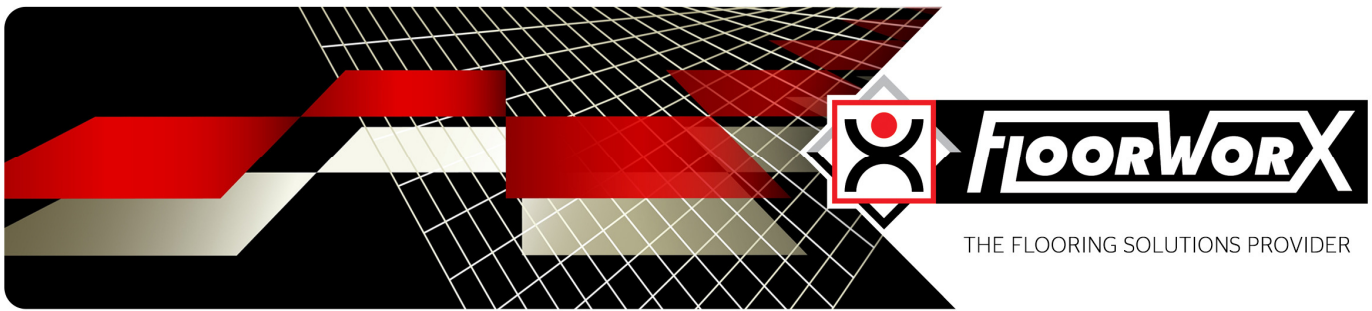

Product: (MS) – Superflex Rolls

Series: (1) - When colour changes are made a new series number is introduced

Colour: (83) - Sandalwood

Year of Manufacture: (20) - 2020

Month of Manufacture: (08) - August

Date of Manufacture: (27) - 27th Tuesday

Batch: Number or Sequence (009) [Probably the most significant number]

Shift Foreman: (V) Responsible person on the line at the time of manufacture

Roll size: (18) Roll size in m²

Gauge Thickness of Sheeting: (2.5) – 2.5mm

Width of Sheeting: (1.2M) – 1.20m wide

Length of Sheeting: (15 Lm) – 15.00L/m in length

NR: (020) – Roll number – Very significant as the rolls **must be installed in roll sequence**

SABS Mark: Bureau of Standards endorsement – Superflex is 786 compliant